


Supermicro SuperChassis SC216BE2C-R920LPB 2U 24xSFF RED PSU

Kod producenta: CSE-216BE2C-R920LPB



Chassis Form Factor	Rack 2U
# of 2.5 hot-swap bays	24
Power Supply	Redundant
PSU Wattage	920 W
PSU Certification	80+ Platinum
Uwagi	Dual Expander SAS3 Backplane

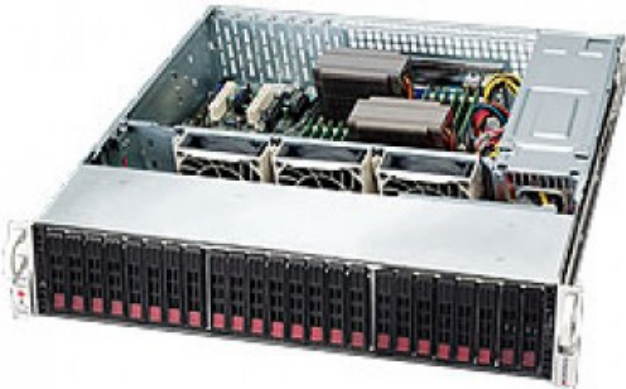

Poniżej prezentujemy szczegółowy opis techniczny oferowanego produktu:

Product SKUs

CSE-216BE2C-R920LPB • SuperChassis 216BE2C-R920LPB
(Black)

Form Factor

2U chassis support for max. motherboard size - 13" x 13.68",
E-ATX and ATX

Processor Support

Supports dual, single Intel® / AMD processors

Dimensions

Width • 17.2" (437mm)
Height • 3.5" (89mm)
Depth • 24.8" (630mm)
Packaging • 26.5" (W) x 10.5" (H) x 38" (L)

Gross Weight 53 lbs (24kg)

Available Color Black

Expansion Slots

• 7x low-profile expansion slots

Drive Bays

24x 2.5" SAS / SATA Hot-swap drive trays
Hot-swap SAS or enterprise SATA HDD only
recommended

Backplane

SAS3 12Gb/s Dual Expander Storage Backplane

Front Panel

Buttons

- Power On/Off button
- System Reset button

LEDs

- Power LED
- Hard drive activity LED
- 2x Network activity LEDs
- System Overheat LED
- Power fail LED

Motherboard (for CSE-216BE2C-R920LPB)

[X10DRC-LN4+](#) [X10DRC-T4+](#)
[X10DRH-C](#) [X10DRH-CLN4](#)
[X10DRH-CT](#) [X10DRH-I](#)
[X10DRH-iT](#) [X10DRi](#)
[X10DRi-LN4+](#) [X10DRi-T](#)
[X10DRi-T4+](#) [X9DAi](#)

System Cooling

Fans 3x 80mm 7000 RPM PWM fans
Optional 5x 60mm middle fan kit:
MCP-320-82603-0N

System Monitoring

Chassis intrusion switch

Operating Environment (System)

Operating Temperature • 5°C ~ 35°C (41°F ~ 95°F)
Range
Non-Operating Temperature • -40°C ~ 60°C (-40°F ~ 140°F)
Range
Operating Relative Humidity • 8% ~ 90% (non-condensing)
Range
Non-Operating Relative Humidity • 5% - 95% (non-condensing)
Range

Power Supply

920W Redundant High-Efficiency Power Supplies
w/ Power Distributor, PMBus 1.2, I²C, and PFC
AC Input • 100-240 V, 50-60 Hz, 11-4.5 Amp
DC Output • +5V standby: 4A
• +12V: 75A
• +5V: 45A
With Power Distributor • +3.3V: 24A
• -12V: 0.6A

Certification



Platinum Certified
[\[Test Report \]](#)

Regulatory (Power Supply)

Power Supply Safety / EMC

- USA - UL listed
- Canada - CUL listed
- Germany - TUV Certified
- EN 60950/IEC 60950-Compliant
- CB Report
- CCC Certification

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-superchassis-sc216be2c-r920lpb-2u-24xsff-red-psu-p-2298.html>