


# Supermicro SuperChassis SC216BAC-R920LPB 2U 24xSFF RED PSU

Kod producenta: CSE-216BAC-R920LPB

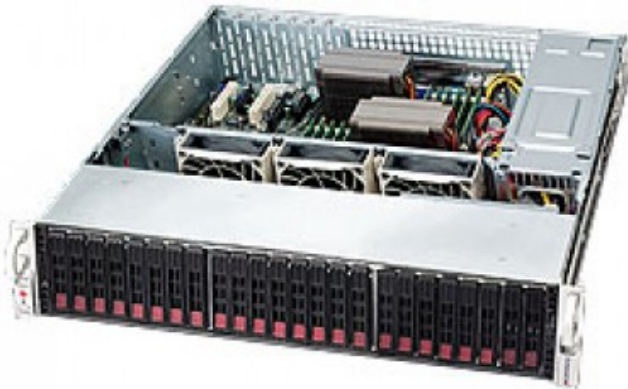

Chassis Form Factor	Rack 2U
# of 2.5 hot-swap bays	24
Power Supply	Redundant
PSU Wattage	920 W
PSU Certification	80+ Platinum
Uwagi	SAS 3.0 12Gb/S Backplane

*Poniżej prezentujemy szczegółowy opis techniczny oferowanego produktu:*

## Product SKUs

CSE-216BAC-R920LPB • SuperChassis 216BAC-R920LPB (Black)

## Form Factor

2U chassis support for max. motherboard size - 13" x 13.68",  
E-ATX and ATX

## Processor Support

Supports dual, single Intel® / AMD processors

## Dimensions

Width • 17.2" (437mm)  
Height • 3.5" (89mm)  
Depth • 24.8" (630mm)  
Packaging • 26.5" (W) x 10.5" (H) x 38" (L)

**Gross Weight** 53 lbs (24kg)

**Available Color** Black

## Expansion Slots

• 7x low-profile expansion slots

## Drive Bays

**Hot-swap** 24x 2.5" SAS / SATA Hot-swap drive trays  
SAS or enterprise SATA HDD only recommended

## Backplane

SAS3 12Gb/s Direct Attached Storage Backplane

## Front Panel

**Buttons**

- Power On/Off button
- System Reset button

**LEDs**

- Power LED
- Hard drive activity LED
- 2x Network activity LEDs
- System Overheat LED
- Power fail LED

## Motherboard (for CSE-216BAC-R920LPB )

[X10DAC](#) [X10DAi](#)  
[X10DRC-LN4+](#) [X10DRC-T4+](#)  
[X10DRi](#) [X10DRi-LN4+](#)  
[X10DRi-T](#) [X10DRi-T4+](#)  
[X10SRH-CLN4F](#)

## System Cooling

**Fans** 3x 80mm 7000 RPM PWM fans  
**Optional** 5x 60mm middle fan kit:  
MCP-320-82603-0N

## System Monitoring

Chassis intrusion switch

## Operating Environment (System)

Operating Temperature • 5°C ~ 35°C (41°F ~ 95°F)  
Range  
Non-Operating Temperature • -40°C ~ 60°C (-40°F ~ 140°F)  
Range  
Operating Relative Humidity • 8% ~ 90% (non-condensing)  
Range  
Non-Operating Relative Humidity • 5% - 95% (non-condensing)  
Range

## Power Supply

920W Redundant High-Efficiency Power Supplies w/ Power Distributor, PMBus 1.2, I<sup>2</sup>C, and PFC  
AC Input • 100-240 V, 50-60 Hz, 11-4.5 Amp  
DC Output • +5V standby: 4A  
• +12V: 75A  
With Power Distributor • +5V: 45A  
• +3.3V: 24A  
• -12V: 0.6A

Certification



**Platinum Certified**

[ [Test Report](#) ]

## Regulatory (Power Supply)

**Power Supply Safety / EMC**

- USA - UL listed
- Canada - CUL listed
- Germany - TUV Certified
- EN 60950/IEC 60950-Compliant
- CB Report
- CCC Certification

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-superchassis-sc216bac-r920lpb-2u-24xsff-red-psu-p-2299.html>