


Supermicro MBD-X10SRi-F, Single SKT, Intel C612 Chipset, SATA, 2xGbE, IPMI Bulk

Kod producenta: MBD-X10SRi-F-B

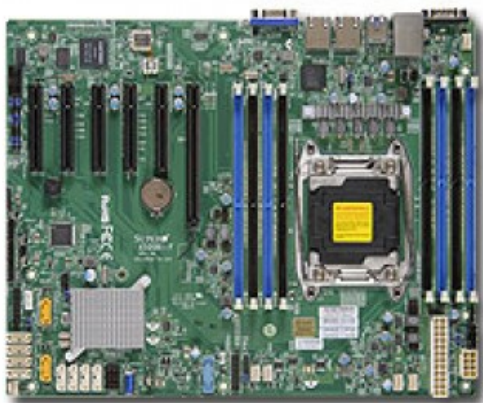

Category	Workstation
Form Factor	ATX
Dimensions	12" x 9.6"
CPU Socket	LGA 2011 (Socket R3)
# of CPU sockets	1
Supported CPU's	Intel Xeon E5-2600v4 Intel Xeon E5-2600v3 Intel Xeon E5-1600v4 Intel Xeon E5-1600v3
Chipset	Intel C612 Wellsburg
Memory Type	DDR4 ECC 3DS LRDIMM DDR4 ECC LRDIMM DDR4 ECC RDIMM
Memory Speed	2400 MHz 2133 MHz 1866 MHz 1600 MHz
# of DIMM's	8
Max Memory Size	1024 GB
Integrated GPU	Aspeed AST2400
# of PCIe x16 3.0	1
# of PCIe x4 3.0	1
# of PCIe x8 3.0	2
# of PCIe x4 2.0	1
# of PCIe x2 2.0	1
# of USB Ports	2 x USB 3.0 (rear) 1 x USB 3.0 (header) 1 x USB 3.0 Type A 2 x USB 2.0 (rear) 6 x USB 2.0 (header)
# of SATA Ports	10
# of SATA DOM power	2
Storage Controllers	6 x AHCI iSATA 6Gb/s 4 x sSATA 6Gb/s
Integrated RAID	0,1,5,10
# of Serial Ports	1 x Fast UART 16550 (rear) 1 x Fast UART 16550 (header)
# of 1GbE Ports	2 x RJ45
Network Controllers	Intel i350 Dual Port Gigabit Etherne
Integrated BMC	IPMI Dedicated RJ45
BMC chip	Aspeed AST2400
TPM	1 x TPM 1.2 20-pin Header
Uwagi	PCI-Express Slots Configuration: 1x PCI-E 3.0 x16 slot 1x PCI-E 3.0 x4 (in x8) slot 2x PCI-E 3.0 x8 slots 1x PCI-E 2.0 x4 (in x8) slot 1x PCI-E 2.0 x2 (in x8) slot

Product SKUs	<input type="checkbox"/>	Chassis (Optimized for X10SRi-F)
<input type="checkbox"/> MBD-X10SRi-F -B	<input type="checkbox"/>	
Physical Stats		
<input type="checkbox"/> Form Factor • ATX		
Dimensions • 12" x 9.6", (30.5cm x 24.4cm)		
Processor		
<input type="checkbox"/> CPU	<input type="checkbox"/>	1U Chassis: - SC813MFTQ-441CB - SC813MFTQ-R400CB - SC813MFTQ-R606CB
Core / Cache		2U Chassis: - SC213LT-600LPB - SC823TQ-653LPB - SC826TQ-R500LPB - SC825TQ-563LPB
Note		3U Chassis: - SC833T-653B - SC836TQ-R500B
Note		Mid/Mini Tower Chassis: - SC732i-500B
		4U / Tower Chassis: - SC743T-665B - SC842TQ-865B - SC84TQ-665B - SC842i-500B
		Important Chassis Notes - To support the new generation Intel® Xeon® processor-based motherboards, Revision M chassis is recommended. Please talk to your sales representative for details.
	<input type="checkbox"/>	
	<input type="checkbox"/>	SuperServer(s) with X10SRi-F
System Memory		
<input type="checkbox"/> Memory Capacity	<input type="checkbox"/>	Model(s) - SYS-5018R-MR - SYS-5018R-M
Memory Type		Expansion Slots
DIMM Sizes		<input type="checkbox"/>
Memory Voltage		PCI-Express
Error Detection		
On-Board Devices		System BIOS
<input type="checkbox"/> Chipset	<input type="checkbox"/>	BIOS Type
SATA controller		AMI BIOS
IPMI		BIOS Features
Network Controllers		Management
Graphics		<input type="checkbox"/>
Input / Output		Software
<input type="checkbox"/> SATA	<input type="checkbox"/>	Power Configurations
LAN ports		
USB		PC Health Monitoring
Video		<input type="checkbox"/>
Serial Port / Header		Voltage
SuperDOM		FAN
TPM		fan connectors
OS Compatibility		Temperature
<input type="checkbox"/>		LED
• Please reference the OS Compatibility Chart for details		Other Features
	<input type="checkbox"/>	Operating Environment
	<input type="checkbox"/>	
		Operating Temperature Range
		Non-Operating Temperature Range
		Operating Relative Humidity Range
		Non-Operating Relative Humidity Range

Strona firmowa produktu:

<https://www.superstorage.pl/supermicro-mbd-x10sri-single-skt-intel-c612-chipset-sata-2xgbe-ipmi-bulk-p-2575.html>